






SUBMITTAL & HUB & SPIGOT CAST IRON SOIL PIPE & FITTINGS

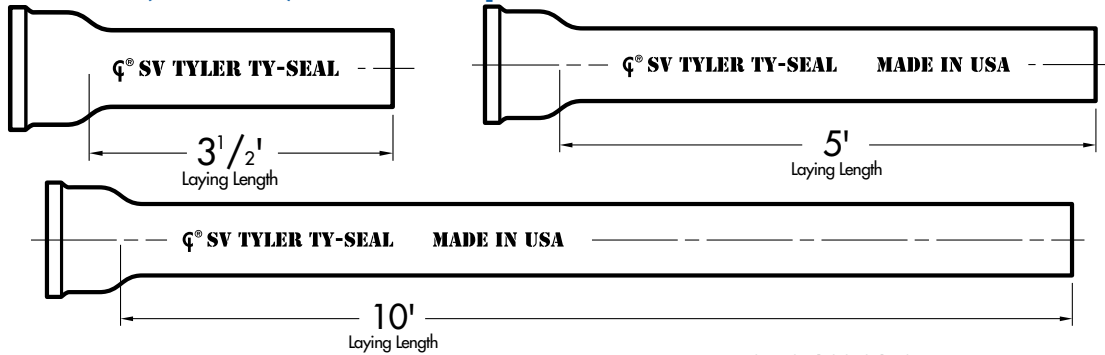

DOUBLE HUB, 30" LENGTHS

| Size | L | Wt. |
|------|--------|-----|
| 2" | 25 | 12 |
| 3" | 24 1/2 | 17 |
| 4" | 24 | 26 |

| SV CLASS SINGLE HUB PIPE | | | | | |
|--------------------------|-----|-------|-----|--------|-----|
| 3-1/2 Ft. | | 5 Ft. | | 10 Ft. | |
| Size | Wt. | Size | Wt. | Size | Wt. |
| 2 | 15 | 2 | 20 | 2 | 38 |
| 3 | 23 | 3 | 31 | 3 | 52 |
| 4 | 30 | 4 | 42 | 4 | 76 |
| 5 | 39 | 5 | 55 | 5 | 97 |
| 6 | 45 | 6 | 62 | 6 | 128 |
| 8 | 72 | 8 | 100 | 8 | 190 |
| 10 | 106 | 10 | 150 | 10 | 270 |
| 12 | 135 | 12 | 190 | 12 | 325 |
| 15 | 184 | 15 | 260 | 15 | 497 |

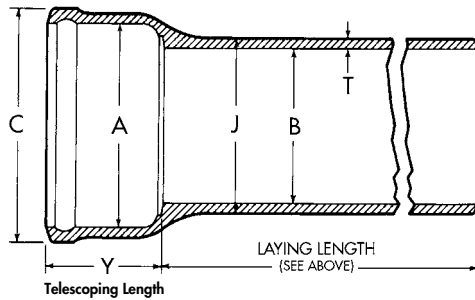

SV PIPE & FITTINGS

| Size | Telescoping Length Y | Hub I.D. A | Hub O.D. C | Barrel O.D. J | Barrel I.D. B | Nominal Thickness T | Minimum Thickness T |
|------|----------------------|------------|------------|---------------|---------------|---------------------|---------------------|
| 2" | 2.50 | 2.94 | 3.62 | 2.30 | 1.96 | 0.17 | 0.14 |
| 3" | 2.75 | 3.94 | 4.68 | 3.30 | 2.96 | 0.17 | 0.14 |
| 4" | 3.00 | 4.94 | 5.68 | 4.30 | 3.94 | 0.18 | 0.15 |
| 5" | 3.00 | 5.94 | 6.68 | 5.30 | 4.94 | 0.18 | 0.15 |
| 6" | 3.00 | 6.94 | 7.68 | 6.30 | 5.94 | 0.18 | 0.15 |
| 8" | 3.50 | 9.25 | 10.13 | 8.38 | 7.94 | 0.23 | 0.17 |
| 10" | 3.50 | 11.38 | 12.44 | 10.50 | 9.94 | 0.28 | 0.22 |
| 12" | 4.25 | 13.50 | 14.56 | 12.50 | 11.94 | 0.28 | 0.22 |
| 15" | 4.25 | 16.95 | 18.11 | 15.88 | 15.16 | 0.36 | 0.33 |

SPECIFICATIONS

All 2-inch through 15-inch hub and spigot cast iron soil pipe and fittings shall conform to ASTM A 74; joints shall be made either by caulked lead and oakum or by compression gaskets such as TY-SEAL which conform to ASTM C 564.

STANDARDS

ASTM A 74: Cast Iron Soil Pipe and Fittings.

ASTM C 564: Rubber Gaskets for Cast Iron Soil Pipe and Fittings

