


SUBMITTAL ♡ NO-HUB® CAST IRON SOIL PIPE & FITTINGS

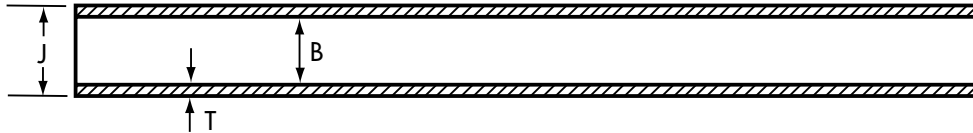

NO-HUB PIPE, TEN-FOOT LAYING LENGTH

Ship Code	Dia.	Wt. per 10' [*] lbs.	Per Bundle	
			Pieces	Wt. lbs.
S	1 1/2	25	54	1350
S	2	36	54	1955
S	3	52	36	1855
S	4	74	27	2013
S	5	94	24	2256
S	6	110	18	1998
S	8	180	15	2718
S	10	258	8	2084
S	12	325	6	2130
S	15	497	4	2060

***Note: Weights approximate, for shipping purposes only.**

DIMENSIONS AND TOLERANCES

Size	Hubless Pipe Barrels		
	B Inside Diameter	J Outside Diameter	T Thickness Norm. Min.
1 1/2*	1.50±.09	1.90±.06	.16 .13
2*	1.96±.09	2.35±.09	.16 .13
3*	2.96±.09	3.35±.09	.16 .13
4*	3.94±.09	4.38+.09-.05	.19 .15
5*	4.94±.09	5.30+.09-.05	.19 .15
6*	5.94±.09	6.30+.09-.05	.19 .15
8*	7.94±.13	8.38±.09	.23 .17
10*	10.00±.13	10.56±.09	.28 .22
12*	11.94±.13	12.50±.13	.28 .22
15*	15.11±.13	15.83±.13	.36 .30

*O.D. Barrel out of round tolerance of ±.04 is permitted for 1 1/2" through 5". O.D. Barrel out of round tolerance of ±.07 for 6" and larger.

"Tyler Pipe Company strongly recommends that its hubless cast iron pipe and fittings be joined with shielded couplings manufactured in accordance with CISPI 310. The use of unshielded couplings or any coupling not meeting the above specifications will void the product warranty"

STANDARDS

♡ NO-HUB® Cast Iron Soil Pipe and Fittings:

- CISPI 301: Hubless Cast Iron Soil Pipe and Fittings.
- ASTM A 888 Hubless Cast Iron Soil Pipe and Fittings.
- ASTM C 564: Rubber Gaskets for Cast Iron Soil Pipe and Fittings.

SPECIFICATIONS

All 1 1/2" diameter and larger cast iron soil pipe and fittings for above and below grade soil, waste, vent lines, rain water conductors and storm drainage lines shall bear the registered insignia ♡ or ♡ NO HUB® indicating that these items used in the sanitary system comply with the Cast Iron Soil Pipe Institute Standards 301 or ASTM A888.

